


AUTOMATIC ROLLER IRONER WITH ROLLER SPEED CONTROL + VACUUM + NOMEX FABRIC AND MAXPRESS COATING, Ø 250X1400 MM S-140/25 AVL

Ref: 0912.12.009
 Magnus

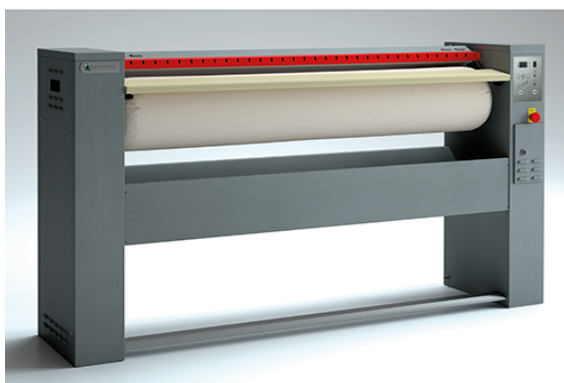

Specially-processed aluminum basin that ensures long life and energy conservation.

Roller supported by bearings.

Front loader use: The ironer can be installed against a wall.

Finger safety band protects the user in case of mismanouver.

Electronic control unit that monitor all machine running parameters and optimizes performance and energy consumption.

Safety thermostat avoids undesirable overheating.

Wide pedal for press movement control.

Manual device for lifting the basin in power down events.

Automatic press operation.

V = Roller speed control.

AV = Roller speed control + vacuum + Nomex fabric.

AVL = Roller speed control + vacuum + Nomex fabric and Maxpress coating.

FEATURES

Dimensions (WDH)	1800x420x1005 mm
Total power	8.63 kW
Heating power	8.4 kW
Power supply	400V/3/50 Hz
Capacity (H.R. 10-15%); (H.R. 20-25%)	40 kg/h; 25/30 kg/h; 12 kg/h
Roller	Ø 250x1400 mm
Speed roller	2 - 4 m/min
Air consumption	70 m3/h

Flue outlet 55 mm

Net weight 135 kg

Packaging dimensions 500x1880x1150 mm

Gross weight 140 kg
