

# SCE 105

**XSafe**

# SIMAG

## 88.5 kg Self-contained Ice Machine

Complete range: SCE 20 - SCE 30 - SCE 40 - SCE 50 - SCE 65 - SCE 90 - SCE 105

### Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



### Internal bin capacity



50 kg of ice

2500 cubes

### Type of ice

Full Cubes



20 g

34 mm



30 mm



### Machine dimensions

Net size WxDxH 700 x 600 x 1062 mm

Net weight 56 kg

Shipping size WxDxH 770 x 680 x 1050 mm

Shipping weight 68 kg

### Voltage

230/50/1 Standard version

220/60/1 Available on demand

### Technology and Certifications



MILANO OFFICE  
Sales Dept.  
Tel. +39 02 93900215  
e-mail: sales@simag.it  
Service Dept.  
Tel. +39 02 93960357  
e-mail: service@simag.it

SIMAG FAR EAST  
Singapore Office  
Tel. ++65 6738 5393  
e-mail: scotsman@scotsman.com.sg

[www.simag.it](http://www.simag.it)


# SCE 105

**XSafe**

# SIMAG

## 88.5 kg Self-contained Ice Machine

Complete range: SCE 20 - SCE 30 - SCE 40 - SCE 50 - SCE 65 - SCE 90 - SCE 105

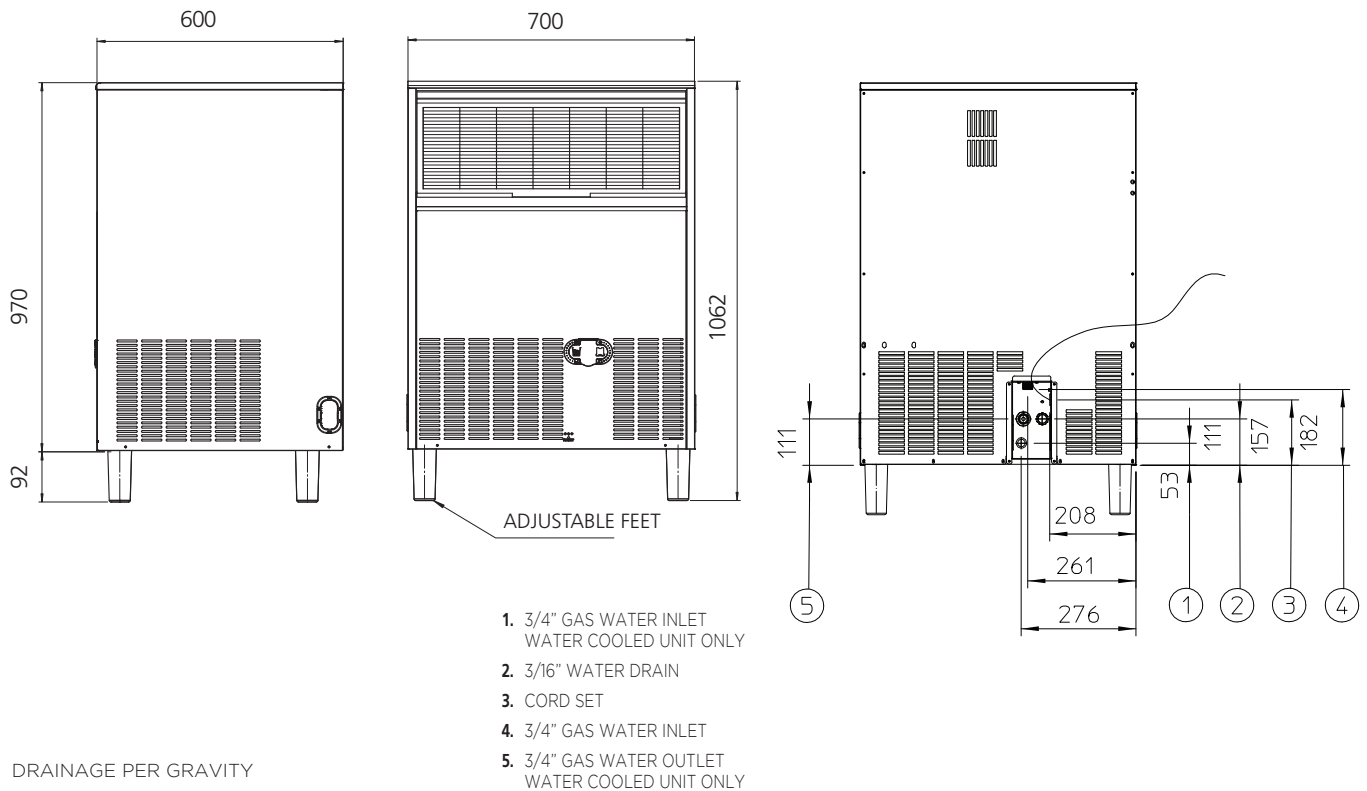

### Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg		Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h
SCE 105 A	230/50/1	88.5	88.5	1000	R134a	0.390	16	27.3	19.7	10.8
SCE 105 W	230/50/1	96	90	700	R134a	0.400	16	23.1	17	69.0

(\*) Power Input: at 43°C Ambient Temperature

(\*\*) Water Consumption: at 32°C Air and 21°C Water