

SCE 40

XSafe

SIMAG

40 kg Self-contained Ice Machine

Complete range: SCE 20 - SCE 30 - SCE 40 - SCE 50 - SCE 65 - SCE 90 - SCE 105

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



Internal bin capacity




15 kg of ice

750 cubes

Type of ice

Full Cubes

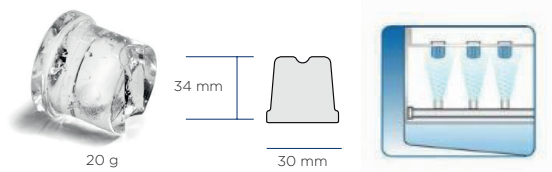

Machine dimensions

Net size WxDxH	467 x 570 x 690 mm
Net weight	35 kg
Shipping size WxDxH	540 x 640 x 800 mm
Shipping weight	41 kg

Voltage

230/50/1 Standard version

115/60/1 - 220/60/1 Available on demand

Technology and Certifications



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg

www.simag.it


SCE 40

XSafe

SIMAG

40 kg Self-contained Ice Machine

Complete range: SCE 20 - SCE 30 - SCE 40 - SCE 50 - SCE 65 - SCE 90 - SCE 105

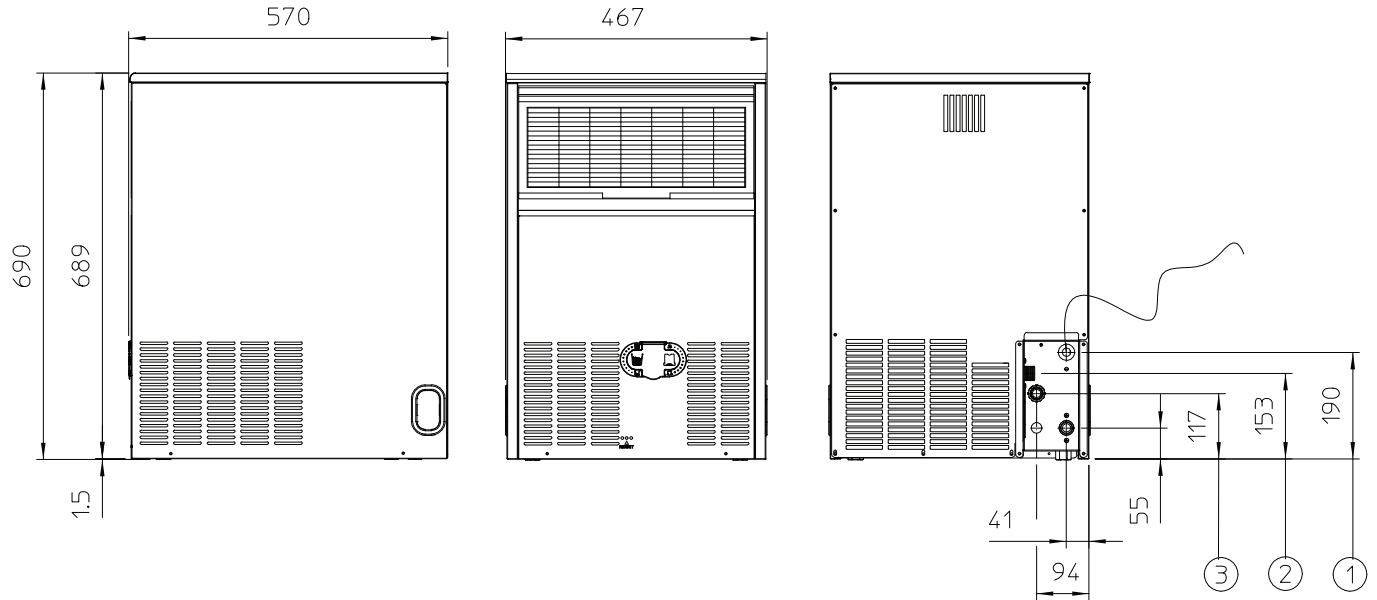

- 1. CORD SET
- 2. 3/16" WATER DRAIN
- 3. 3/4" GAS WATER INLET

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg		Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h
SCE 40 A	230/50/1	40	38.5	650	R134a	0.290	10	37.9	11	3.5
SCE 40 W	230/50/1	38	38	440	R134a	0.250	10	31.5	10	36.5

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water