

SDE 220

SIMAG

215 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

Technical features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system



Internal bin capacity




68 kg of ice

3240 cubes

Type of ice

Hollow Cubes

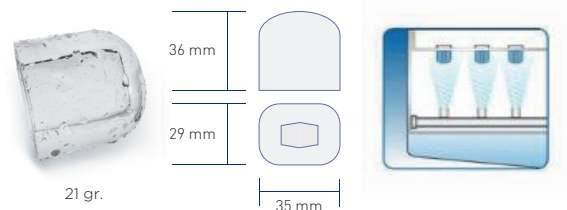

Machine dimensions

Net size WxDxH	1042 x 575 x 1131 mm
Net weight	131 kg
Shipping size WxDxH	1100 x 640 x 1230 mm
Shipping weight	148 kg

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Technology and Certifications



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SDE 220

SIMAG

215 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

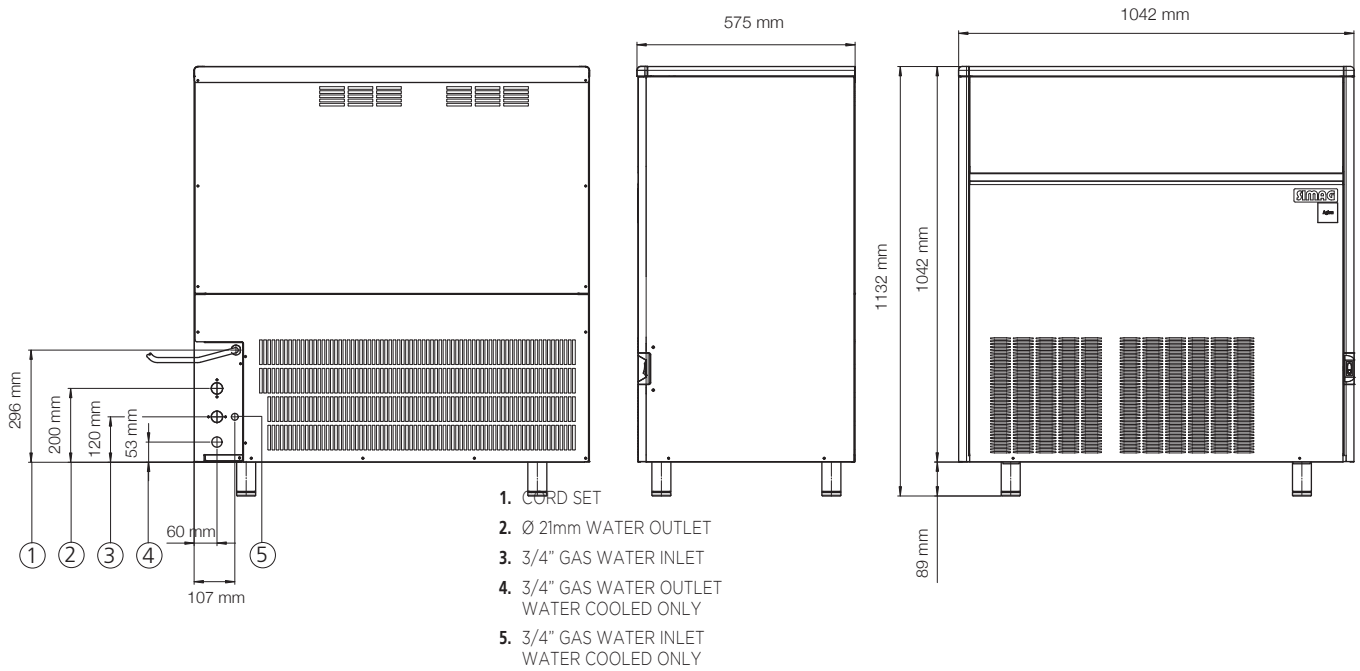

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg 10°C/10°C	Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
				Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SDE 220 A	230/50/1	215	1800	R452A	0.650	20	24.15	35	13.5
SDE 220 W	230/50/1	215	1800	R452A	0.560	20	n.a.	n.a.	n.a.
SDE 220 A	220/60/1	215	1800	R404A	0.630	20	n.a.	n.a.	n.a.
SDE 220 W	220/60/1	215	1800	R404A	0.500	20	n.a.	n.a.	n.a.

(*) Power Input: at 43°C Ambient Temperature
 (**) Water Consumption: at 32°C Air and 21°C Water