

AUTOMATIC ROLLER IRONER, Ø 300X1600 MM S-160/30

Ref: 0912.12.006
 Magnus

Specially-processed aluminum basin that ensures long life and energy conservation.

Roller supported by bearings.

Front loader use: The ironer can be installed against a wall.

Finger safety band protects the user in case of mismanouver.

Electronic control unit that monitor all machine running parameters and optimizes performance and energy consumption.

Safety thermostat avoids undesirable overheating.

Wide pedal for press movement control.


Manual device for lifting the basin in power down events.

Automatic press operation.

V = Roller speed control.

AV = Roller speed control + vacuum + Nomex fabric.

AVL = Roller speed control + vacuum + Nomex fabric and Maxpress coating.

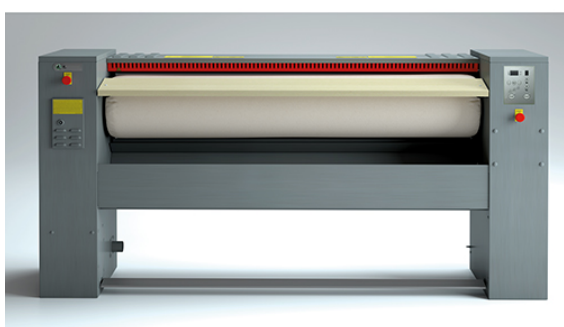

FEATURES

Dimensions (WDH)	2200x500x1100 mm
------------------	------------------

Total power	13.56 kW
-------------	----------

Heating power	13.2 kW
---------------	---------

Power supply	400V/3/50 Hz
--------------	--------------

Capacity (H.R. 10-15%)	50 kg/h
------------------------	---------

Roller	Ø 300x1600 mm
--------	---------------

Speed roller	3.9 m/min
--------------	-----------

Net weight	257 kg
------------	--------

Packaging dimensions	620x2250x1290 mm
----------------------	------------------

Gross weight	249 kg
--------------	--------