

AUTOMATIC ROLLER IRONER, Ø 250X1000 MM S-100/25

Ref: 0912.12.002
 Magnus

Specially-processed aluminum basin that ensures long life and energy conservation.

Roller supported by bearings.

Front loader use: The ironer can be installed against a wall.

Finger safety band protects the user in case of mismanouver.

Electronic control unit that monitor all machine running parameters and optimizes performance and energy consumption.

Safety thermostat avoids undesirable overheating.

Wide pedal for press movement control.


Manual device for lifting the basin in power down events.

Automatic press operation.

V = Roller speed control.

AV = Roller speed control + vacuum + Nomex fabric.

AVL = Roller speed control + vacuum + Nomex fabric and Maxpress coating.

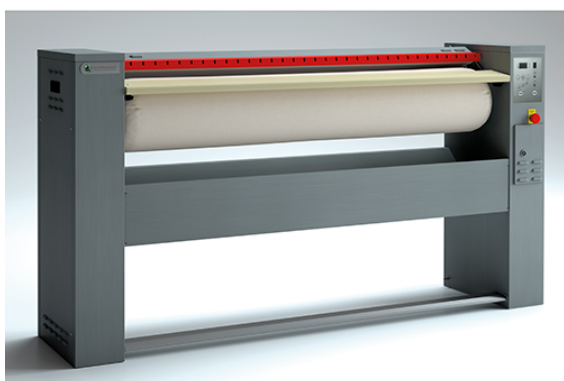

FEATURES

Dimensions (WDH)	1400x420x1005 mm
------------------	------------------

Total power	5.18 kW
-------------	---------

Heating power	5 kW
---------------	------

Power supply	400V/3/50 Hz
--------------	--------------

Capacity (H.R. 10-15%)	30 kg/h
------------------------	---------

Roller	Ø 250x1000 mm
--------	---------------

Speed roller	3.9 m/min
--------------	-----------

Net weight	110 kg
------------	--------

Packaging dimensions	500x1490x1165 mm
----------------------	------------------

Gross weight	119 kg
--------------	--------